


Example Schematic
PRO48HBT70

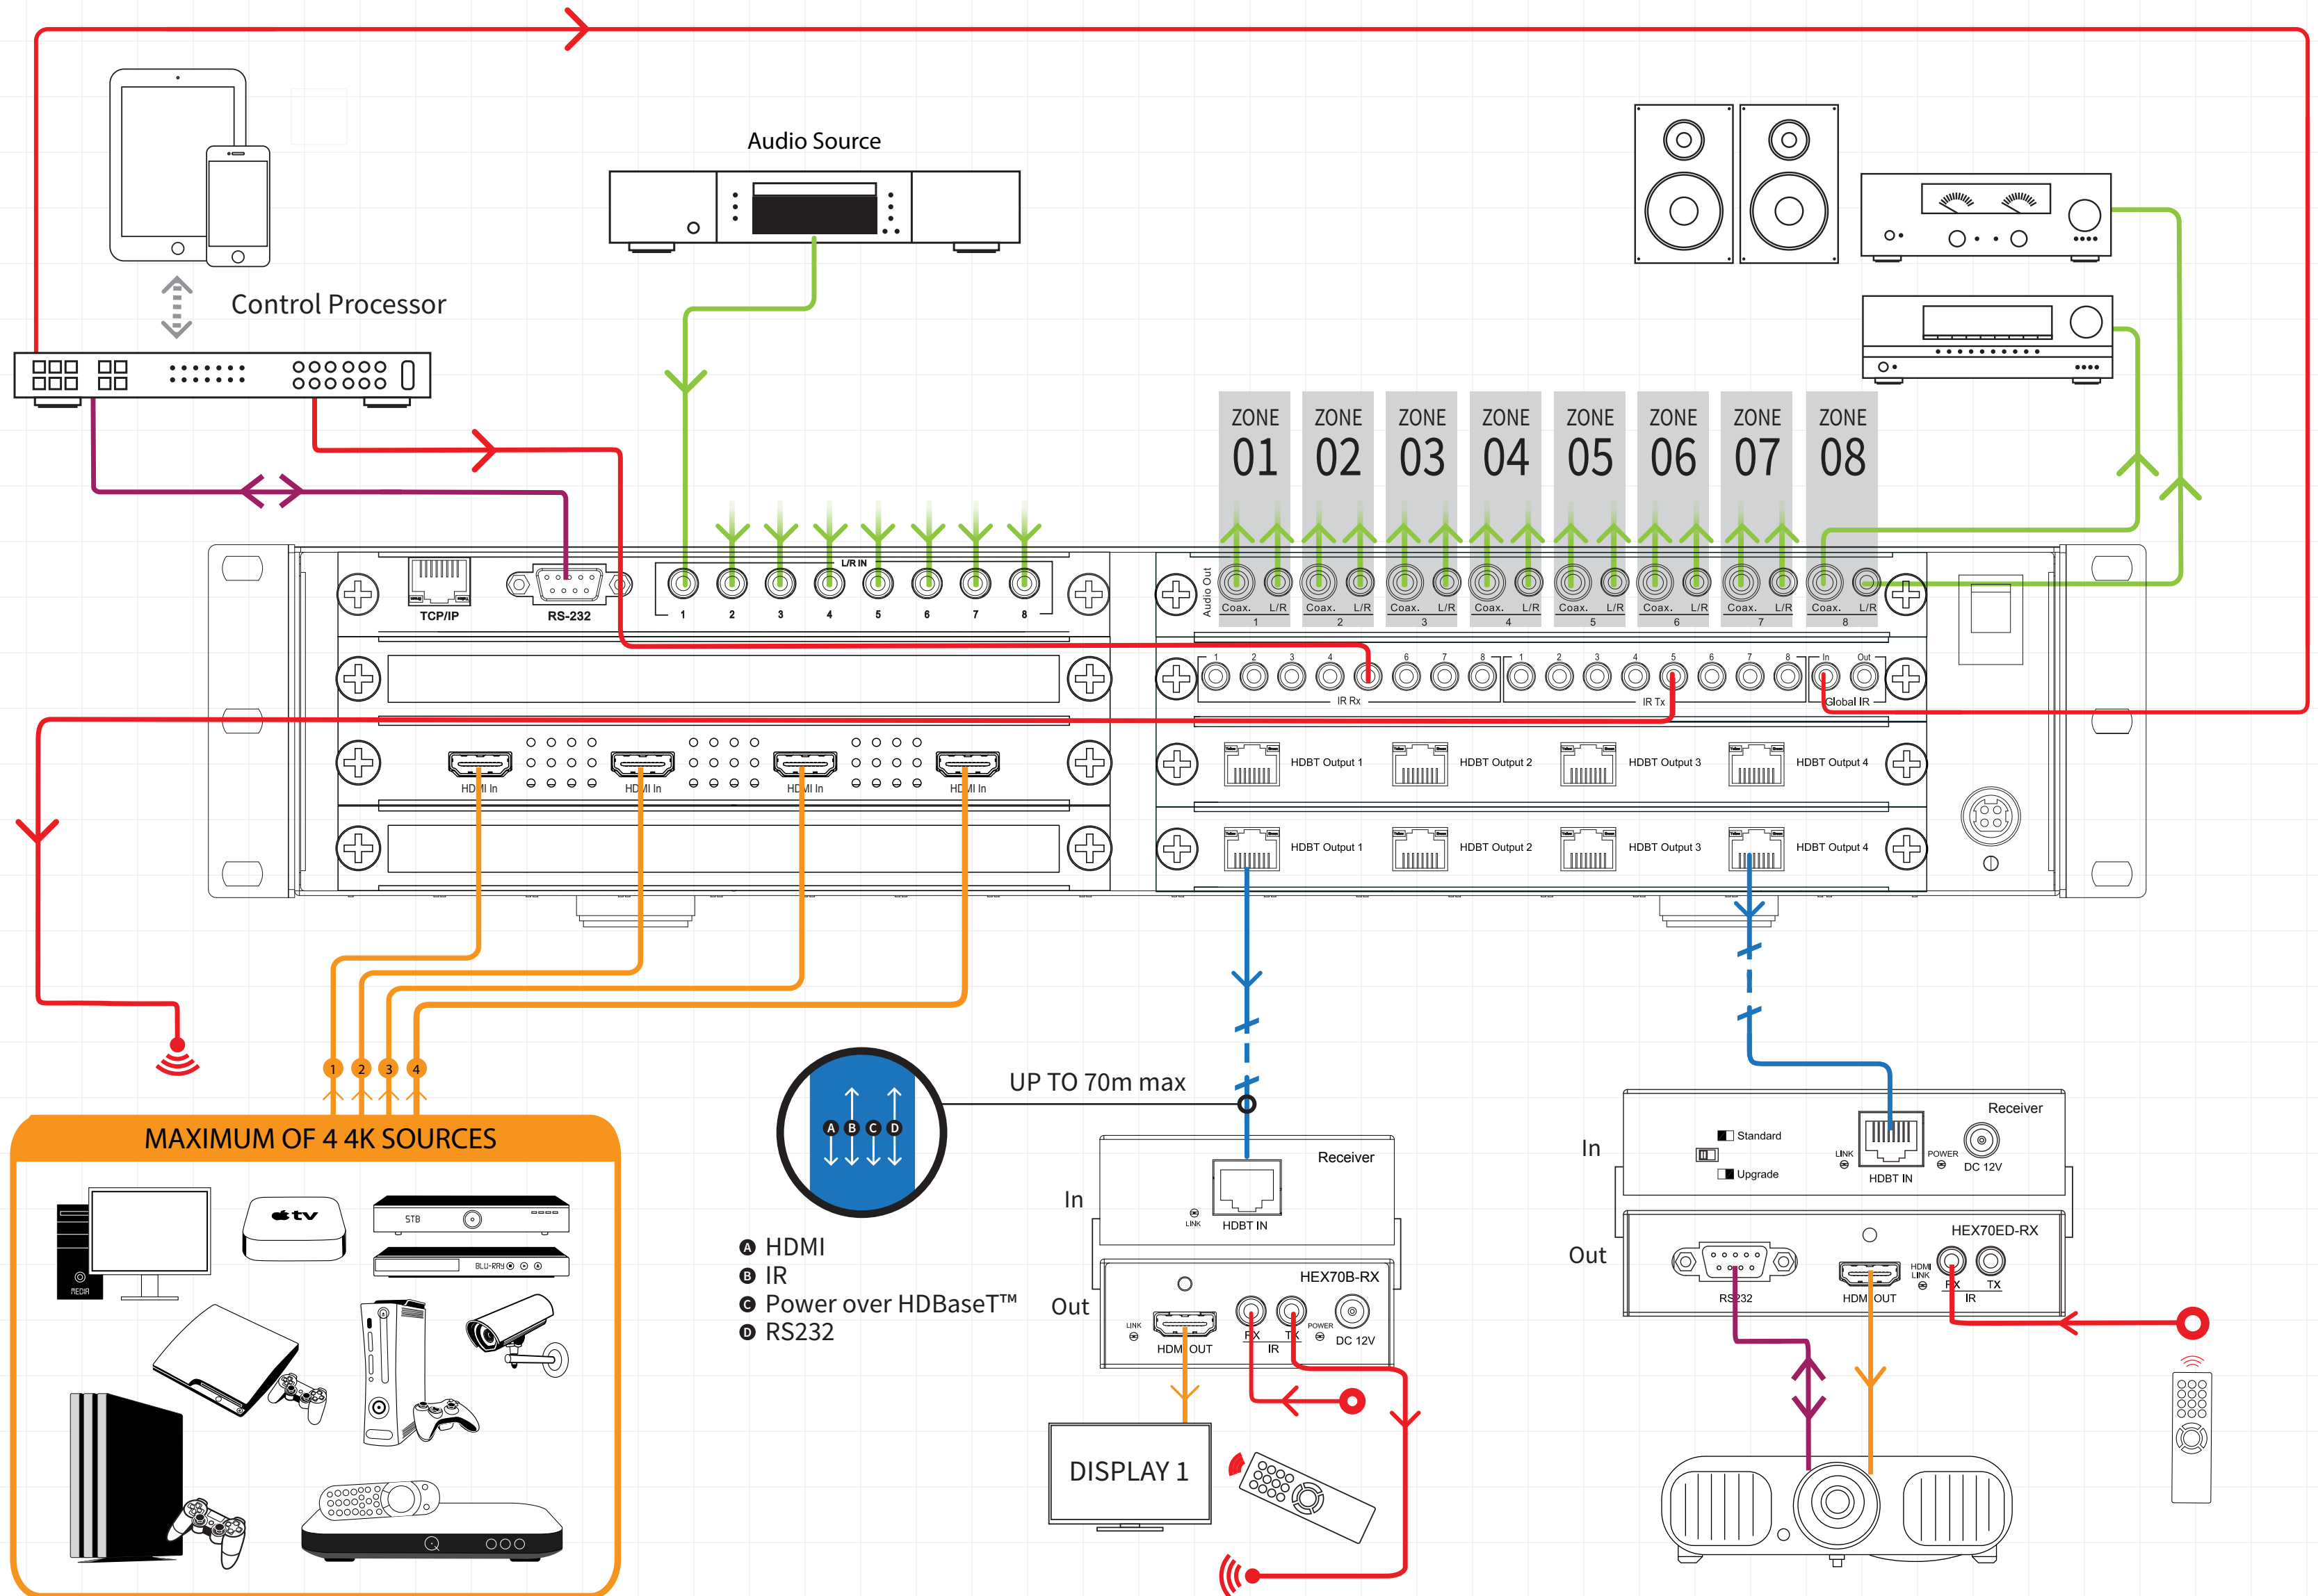

Legend:

- CAT 5e/6/6a/7
- RS232
- HDMI
- Audio
- IR Cable

MAXIMUM OF 4 4K SOURCES

UP TO 70m max

A HDMI
 B IR
 C Power over HDBaseT™
 D RS232

HEX70B-RX

In: HDBT IN

Out: HDM OUT, IR, TX, DC 12V

DISPLAY 1

Receiver

In: HDBT IN, DC 12V

Out: RS232, HDM OUT, IR, TX

HEX70ED-RX